

FIG. 1

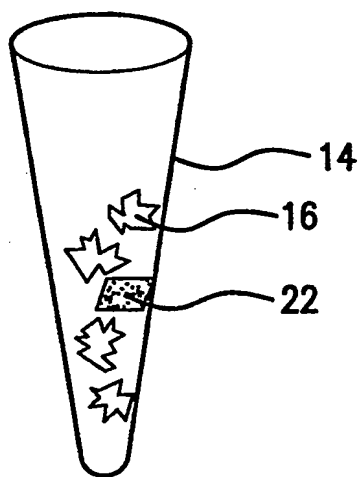


FIG. 2

2/10

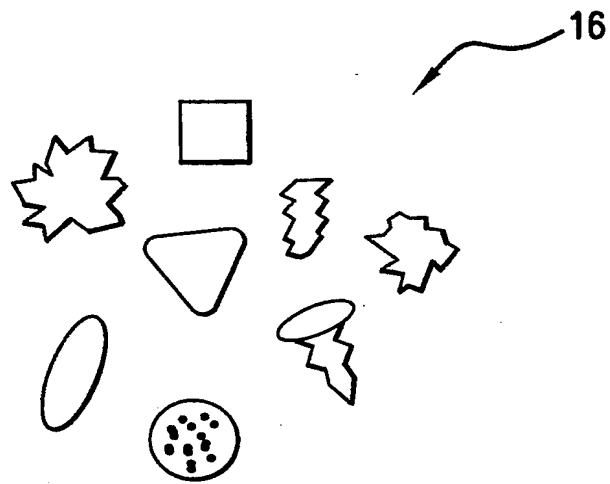


FIG. 3




FIG. 4A





FIG. 4B



FIG. 4C

3/10

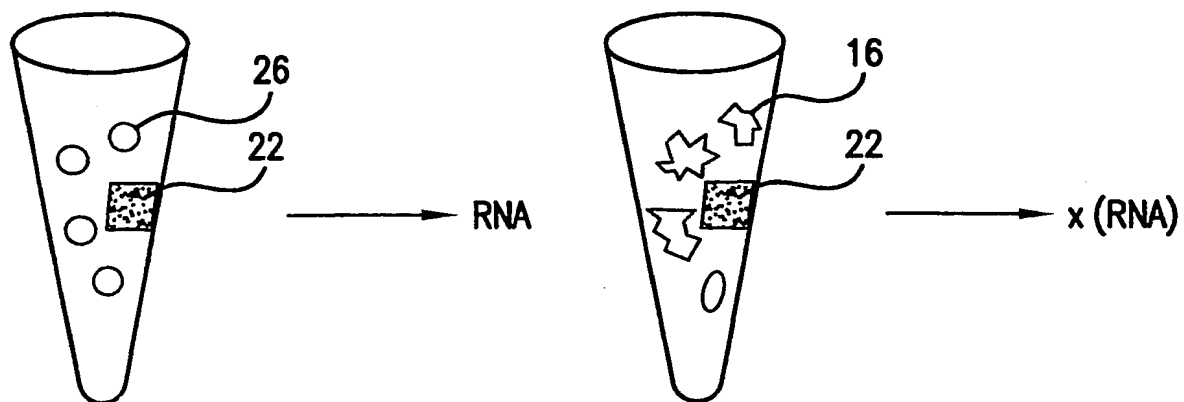


FIG.5

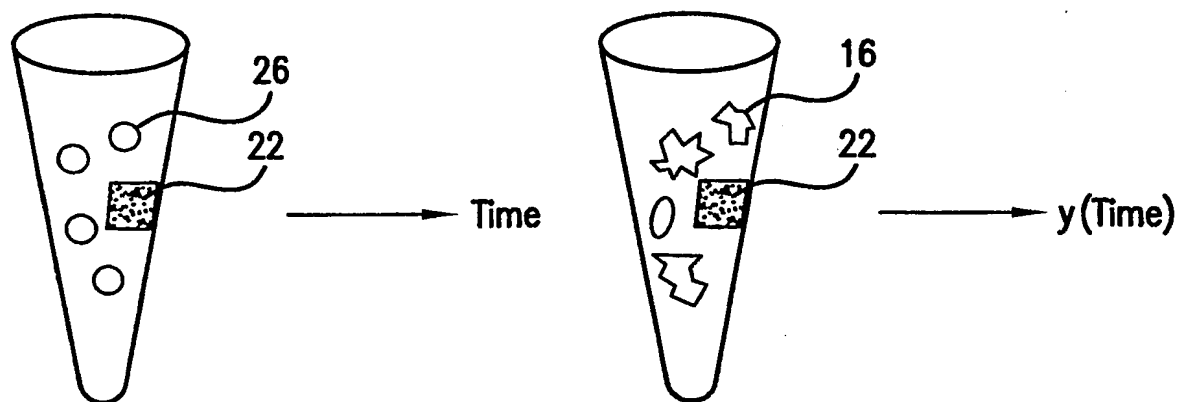


FIG.6

4/10

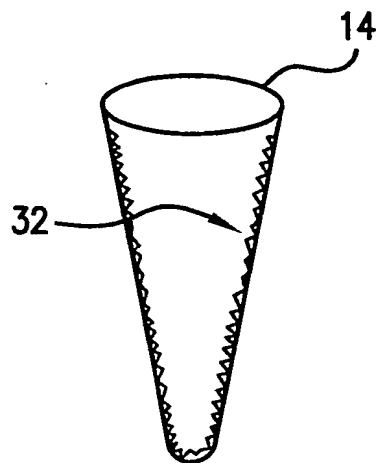


FIG. 7

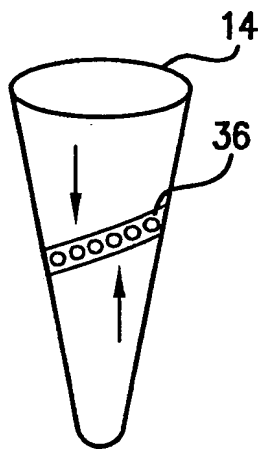


FIG. 8

5/10

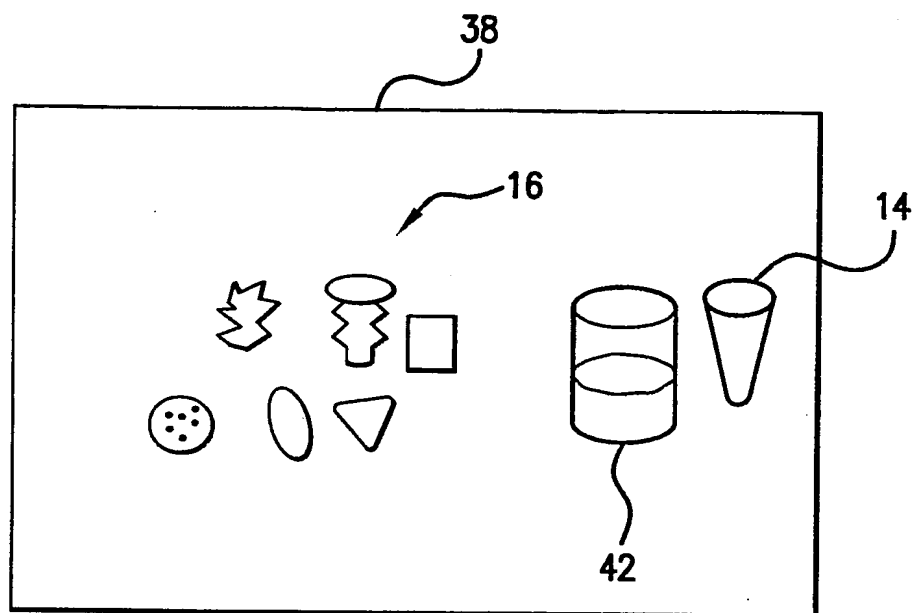


FIG. 9

6/10

BEST AVAILABLE COPY

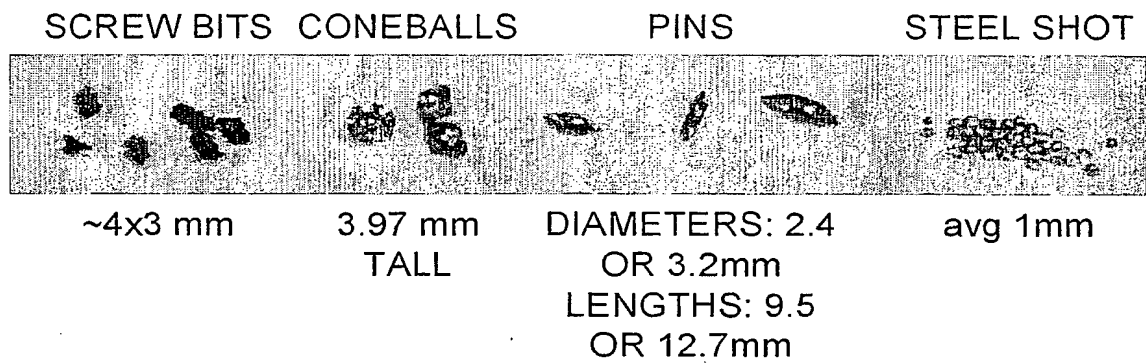


FIG.10

7/10

BioAnalyzer Profile of RNA recovered by Polytron and the Disclosed Method

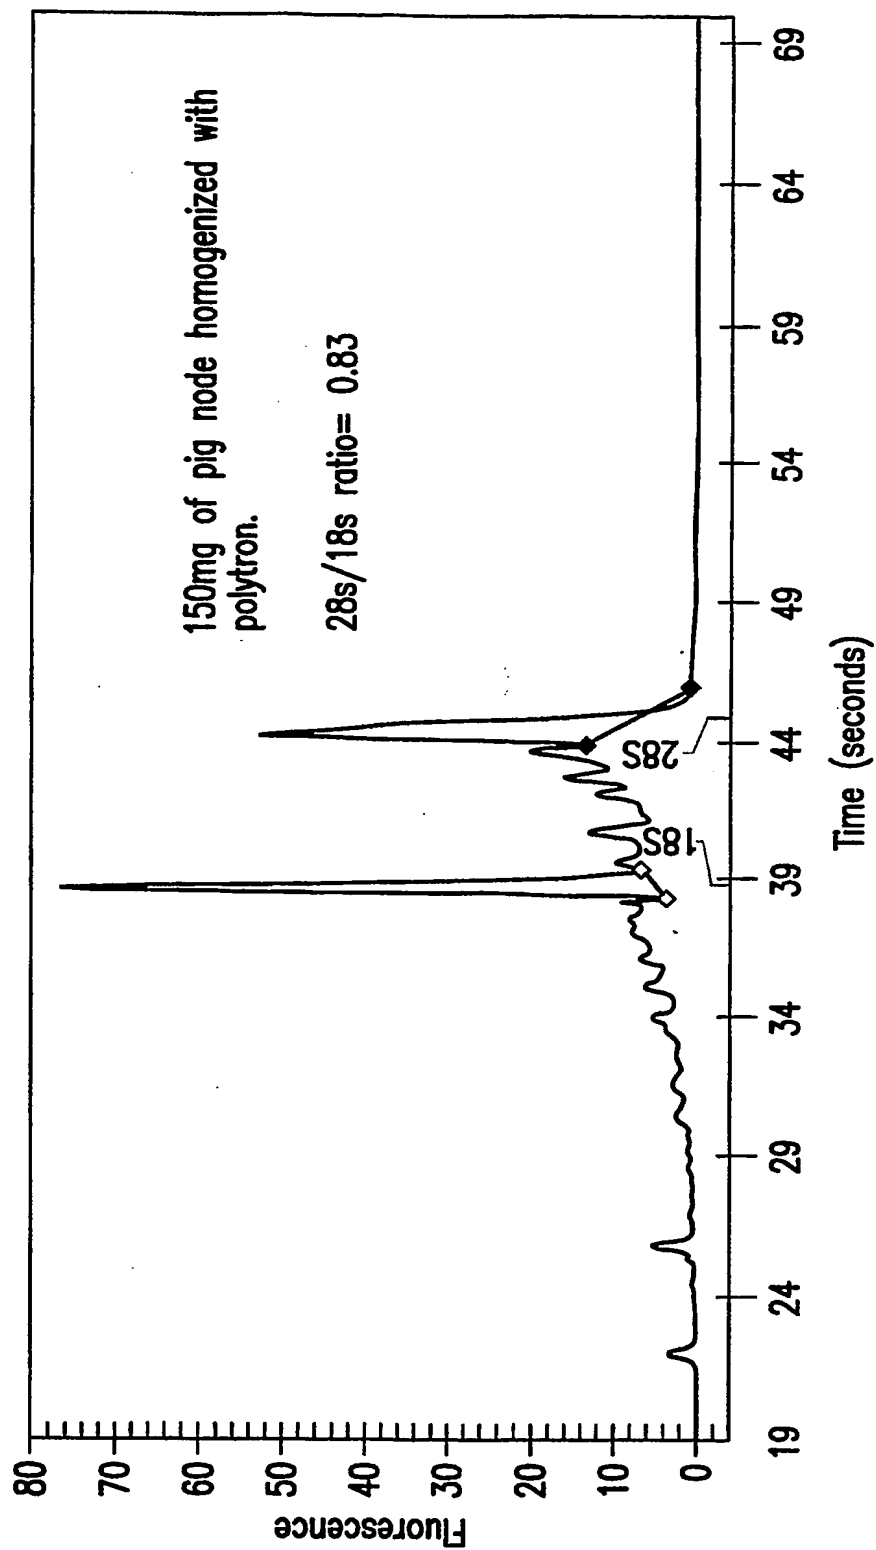


FIG.11A

8/10

BioAnalyzer Profile of RNA recovered by Polytron and the Disclosed Method

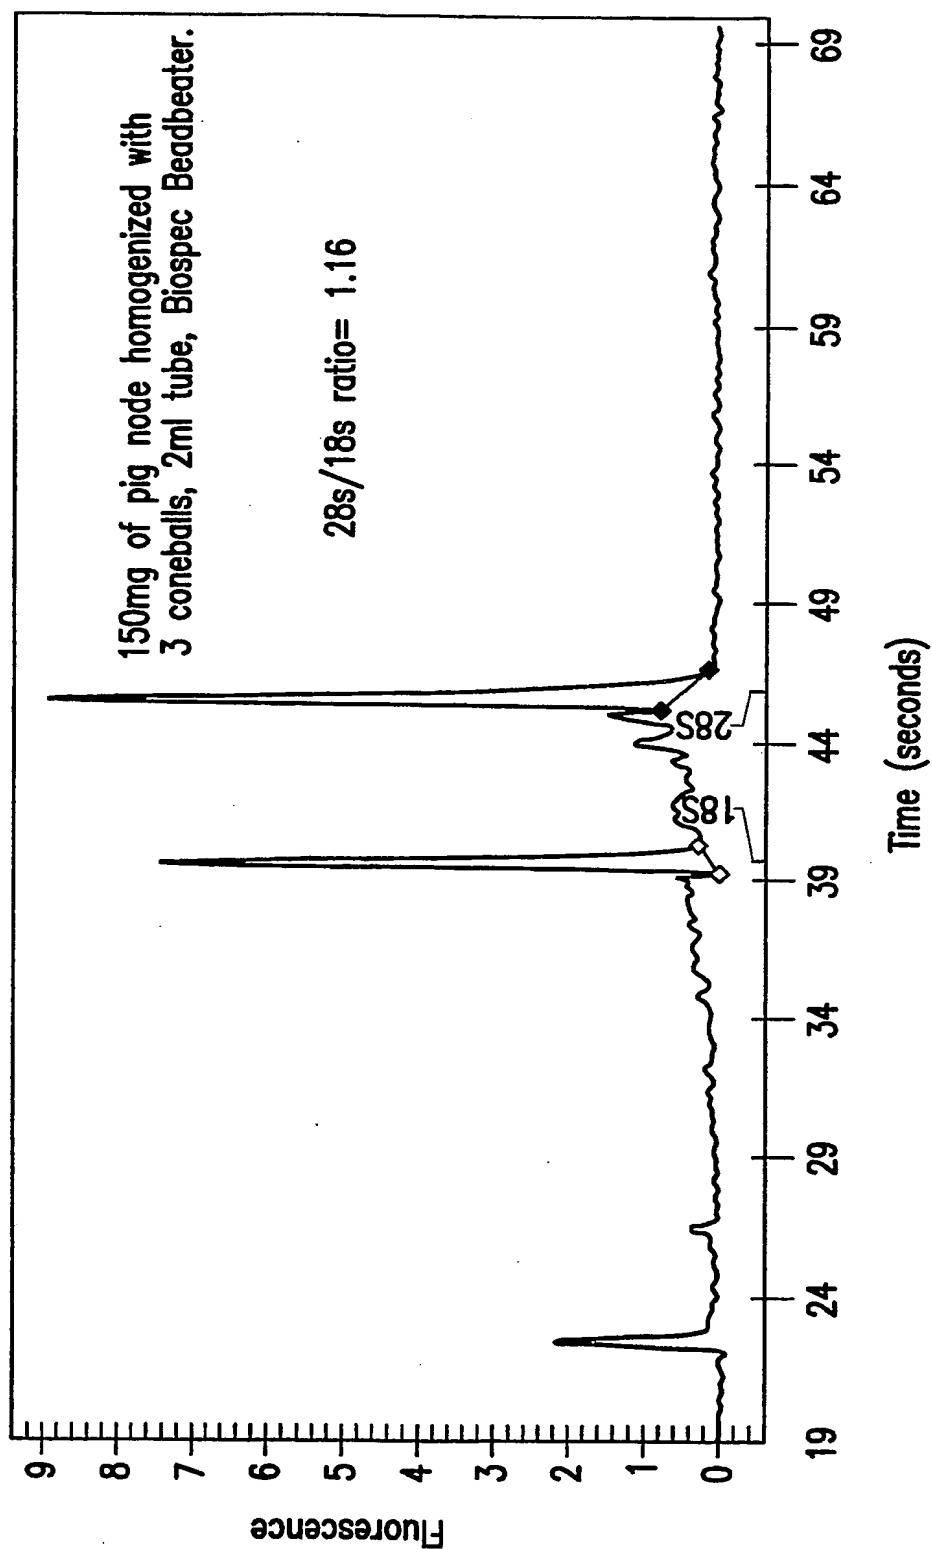


FIG.11B

9/10

BEST AVAILABLE COPY

VIAL DIMENSIONS:
50 X 15mm
CAP HEIGHT: 8mm

MODIFIED:
36 X 15mm
CAP: 4mm

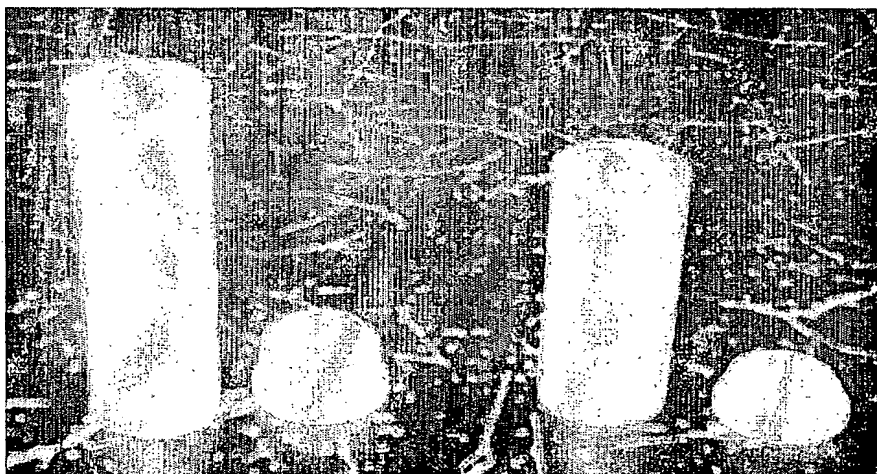



FIG.12

10/10

BALLCONE		Order by Size	Dimensions	
			A	B
		1/8"	.125	.170
		5/32"	.215	.270
		3/16"	.270	.300
		1/4"	.320	.400
		5/16"	.375	.465

Designed to combine the action of balls and cones with one scientifically proportioned shape.

FIG.13A



DIAGONALS		Order by Size	Dimensions		
			A	B	B
Beveled edges of diagonally-cut ends provide effective finishing action in corners. Cylindrical body offers wide area contacts.		1/8"	.125	.125	.225
		5/32"	.156	.156	.275
		3/16"	.187	.187	.325
		7/32"	.218	.218	.380
		1/4"	.250	.250	.445
		5/16"	.312	.312	.545
		3/8"	.375	.375	.655

FIG.13B

PINS Tapering to pointed ends, pins reach into the recesses of figured work and grooves, deflash through-holes and clean threaded areas.



SLIM (S)

3/64" x 3/8"

3/64" x 1/2"

1/16" x 9/32"

1/16" x 1/2"



TAPER (T)

3/32" x 3/8"

1/8" x 3/8"

1/8" x 1/2"

5/32" x 1/2"

FIG.13C